

# Technical Datasheet - Glass Panel / Shadow Gap

## Aluminium Glass Panel Profile - LGA




### Product Description

Genesis LGA is a decorative Aluminium profile designed to create a feature in ceramic wall tile installations or can be used as a glass panel for a shower unit.

### Dimensions and Colour

All available in 2.5m lengths and 8mm, 10mm and 12.5mm depths in a Bright Silver finish.

### Range

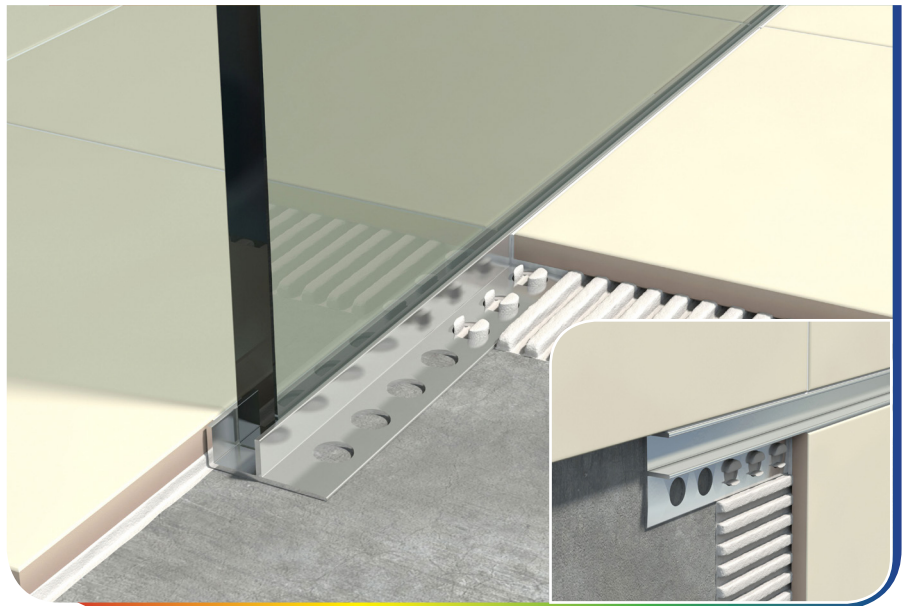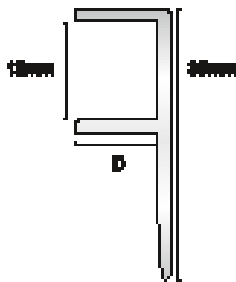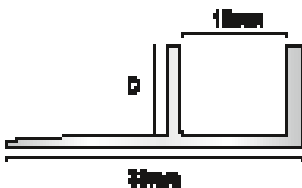

### Maintenance

Genesis LGA profiles do not require any special maintenance. Oxidation films on Aluminium may be removed with a common polishing agent; however, they do reoccur. Damaged anodised finishes may only be repaired by recoating.

Aluminium must be tested to verify its suitability if chemical stresses are anticipated.

Cementitious materials, in conjunction with moisture, become alkaline. Since aluminium is sensitive to alkaline substances, exposure to the alkali (depending on the concentration and time of exposure) may result in corrosion (aluminium hydroxide formation). Therefore, it is important to remove adhesive or grout residue from visible surfaces. In addition, ensure that the profile is solidly embedded in the setting material and that all cavities are filled to prevent the collection of alkaline water.

The anodised layer creates a finish that retains a uniform appearance during normal use. The surface, however, is susceptible to scratching and wear and may be damaged by tile adhesive, mortar, or grouting material. Therefore, setting materials must be removed immediately. Otherwise, the description regarding aluminium applies.

### Installation

1. Select LGA according to tile thickness.
2. Trowel tile adhesive over the area that forms the perimeter of the tiled covering.
3. Press the perforated anchoring leg of the LGA into the tile adhesive and align, mechanical fix if required.
4. Trowel additional adhesive over the perforated anchoring leg to ensure full coverage.
5. Solidly embed the tiles so that the tiled surface is flush with the top of the profile, the profile should not be higher than the tiled surface, but rather up to approximately 1 mm lower.
6. Fill the joint completely with grout.

Aluminium AA 6063 T6 / UNS A96063 anodised to DIN 17611	
Si%	0.2-0.6
Fe%	0.35
Cu%	0.1
Mn%	0.1
Mg%	0.45-0.9
Zn%	0.1
Ti%	0.1
Cr%	0.1
Al	Balance

P.V.C. Trim • Stair Nosings • Movement Joints • Transitions • Entrance Matting • Edge Protection • Metal Profiles • Tactiles • Tools

**LITOKOL®**  
HI-PERFORMANCE BUILDING PRODUCTS

Litokol spa - via G. Falcone, 13/1 - Rubiera (RE) - Italy  
Tel.+39.0522.622811- info@litokol.it - www.litokol.it

 **Genesis**  
For the Perfect Finish

