

Technical Datasheet - Expansion Joints

Aluminium Intermediate Joint - MMA

Product Description


Genesis MMA is a Medium Duty Aluminium Movement Joint providing adequate protection to the edge of the floor covering for pedestrian and light mechanical traffic, foot trolley etc.

Dimensions and Colour

Available in 2.5m in lengths and 10mm and 12mm depths.

See Movement Joint Colour chart for available infill colours.

Range

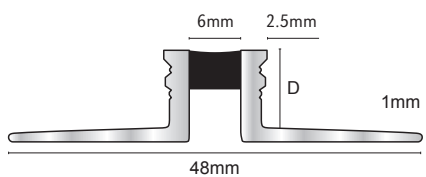

Aluminium AA 6063 T6 / UNS A96063 anodised to DIN 17611

Si%	0.2-0.6
Fe%	0.35
Cu%	0.1
Mn%	0.1
Mg%	0.45-0.9
Zn%	0.1
Ti%	0.1
Cr%	0.1
Al	Balance

Where to use Movement Joints

Movement Joints must be installed in certain areas and positions to prevent tiles debonding from the Substrate, industry guidelines suggest that the maximum field should be no more than 10m in each direction but in practice, depending on the individual applications it tends to be between 5-8m. British Standards (BS) 5385 covers the requirements and methods for movement joints applications. Part 3: 1989-Section 3-19.1.1 states the building designer should assess the magnitude of any stresses and decide where movement joints should be located taking into consideration all the relevant factors. Movement Joints must be installed directly above any changes in substrate or movement joints/Gaps in the substrate

Performance

British Standard BS 5385 recommends that a Joint should be able to absorb 20% of the width of the Joint in movement accommodation; these Joints far surpass the minimum requirement. The movement Joints fit this criteria for expansion and compression on a lateral basis.

Maintenance

To achieve the most favorable performance, please follow the maintenance instructions below.

1. Regular maintenance of the Profile will help prolong the life of the product. A build up of dirt and grease can prove hazardous and also affect the appearance of the profile.
2. Firstly, any excess dirt should be removed by using a quality vacuum cleaner or a soft bristle brush. A harsh bristle will mark the material.
3. The profile should then be cleaned by using a soapless, neutral detergent in warm water on a damp cloth. They should then be rinsed with clean water, again using a soft, damp cloth.
4. Polishes will reduce anti-slip properties and solvent cleaners are not suitable

Installation

1. Ensure the correct Depth of Profile is selected according to the tile depth.
2. Using a suitable Notched Trowel spread Tile Adhesive onto the floor in accordance with the manufacturers guidelines.
3. Firmly bed the adhesive into the adhesive in the correct location - make sure that the adhesive penetrates the holes in the flange.
4. Spread the adhesive over the the anchoring legs and bed the tiles firmly into the adhesive (best practice is for the profile to be approximately 1mm lower than the Tile).
5. A grout joint should be left between the tile and the profile.

P.V.C. Trim • Stair Nosings • Movement Joints • Transitions • Entrance Matting • Edge Protection • Metal Profiles • Tactiles • Tools

LITOKOL®
HI-PERFORMANCE BUILDING PRODUCTS

Litokol spa - via G. Falcone, 13/1 - Rubiera (RE) - Italy
Tel.+39.0522.622811- info@litokol.it - www.litokol.it

 **Genesis**
For the Perfect Finish

